


U形溝

図 300B

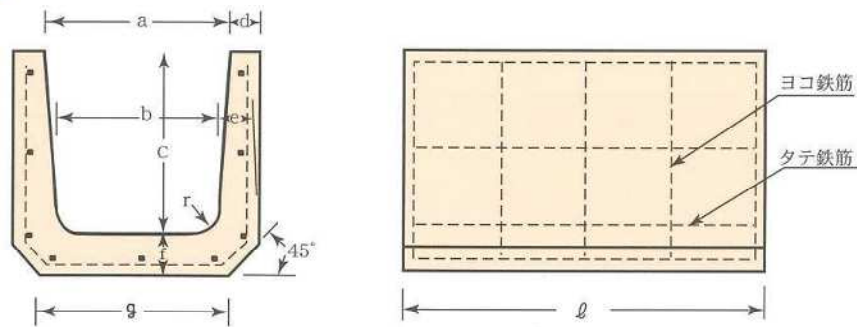


呼び名	寸法									鉄筋				重量 (kg)
	a	b	c	d	e	f	g	r	単位 m/m	縦鉄筋		横鉄筋		
										径	数量	径	数量	
※ 120	120	105	120	25	30	30	120	20	600	2.6	5	2.6	5	16
150	150	140	150	30	35	35	160	30	600	2.6	5	2.6	5	24
180	180	170	180	35	40	40	190	50	600	2.6	5	3.2	5	34
240	240	220	240	45	50	50	240	50	600	3.2	7	3.2	5	57
300A	300	260	240	50	60	60	300	50	600	3.2	9	4.0	5	71
300B	300	260	300	50	60	60	300	50	600	3.2	9	4.0	5	82
300C	300	260	360	50	60	65	300	50	600	3.2	11	4.0	7	93
360A	360	310	300	50	65	65	360	50	600	4.0	11	4.0	6	91
360B	360	310	360	50	65	65	360	50	600	4.0	11	4.0	8	103
450	450	400	450	55	70	70	430	70	600	4.0	13	5.0	8	135
600	600	540	600	70	80	80	600	70	600	6.0	15	6.0	8	209
※ 800	800	720	800	80	90/110	110	800	95	1,000	D6	15	D6	15	538
240	240	220	240	45	50	50	240	50	1,000	3.2	7	3.2	8	95
300B	300	260	300	50	60	60	300	50	1,000	3.2	9	4.0	8	137
360B	360	310	360	50	65	65	360	50	1,000	4.0	11	4.0	13	172

※印は J I S 規格外

補強筋 呼び名600 U形についてのみ径6.0mmのものをも両側にそれぞれ4ヶ所入れる。

側溝

U形溝蓋

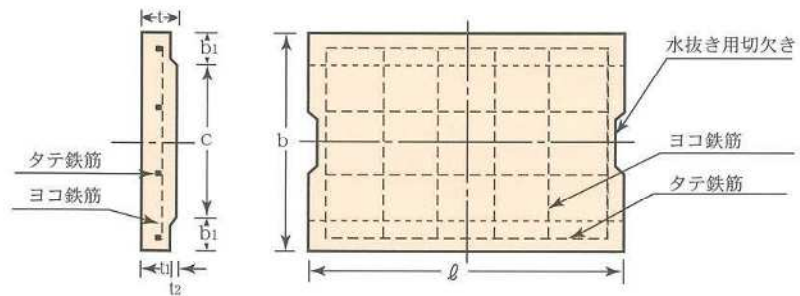

種別	呼び名	寸法							単位 m/m	鉄筋				重量 (kg)
		b	c	b ₁	t	t ₁	t ₂	ℓ		縦鉄筋		横鉄筋		
										径	数量	径	数量	
種 1	※ 120	170	110	30	35	30	5	600	3.2	3	3.2	3	8	
	150	210	140	35	35	30	5	600	2.6	3	2.6	5	10	
	180	250	170	40	40	35	5	600	2.6	3	2.6	6	14	
	240	330	230	50	45	40	5	600	3.2	4	3.2	6	20	
	300	400	290	55	60	50	10	600	3.2	4	4.0	6	33	
	360	460	350	55	65	55	10	600	3.2	4	5.0	6	40	
	450	560	440	60	70	60	10	600	4.0	5	6.0	5	51	
	600	740	590	75	75	65	10	600	4.0	6	6.0	6	77	
※ 800	960	790	85	85	70	15	600	6.0	8	6.0	7	107		
種 2	150	210	140	35	90	80	10	600	6.0	3	D 6.0	5	26	
	180	250	170	40	90	80	10	600	6.0	3	D 6.0	6	31	
	240	330	230	50	100	85	15	600	6.0	3	D10.0	5	44	
	300	400	290	55	100	85	15	600	6.0	4	D10.0	5	56	
	360	460	350	55	100	85	15	600	6.0	5	D10.0	6	66	
	450	560	440	60	120	100	20	600	6.0	6	D10.0	6	94	
	600	740	590	75	150	130	20	600	6.0	6	D10.0	6	162	
※ 800	960	790	85	150	130	20	600	D10.0	8	D13.0	7	200		

※印は J I S 規格外